


Outline dimensions

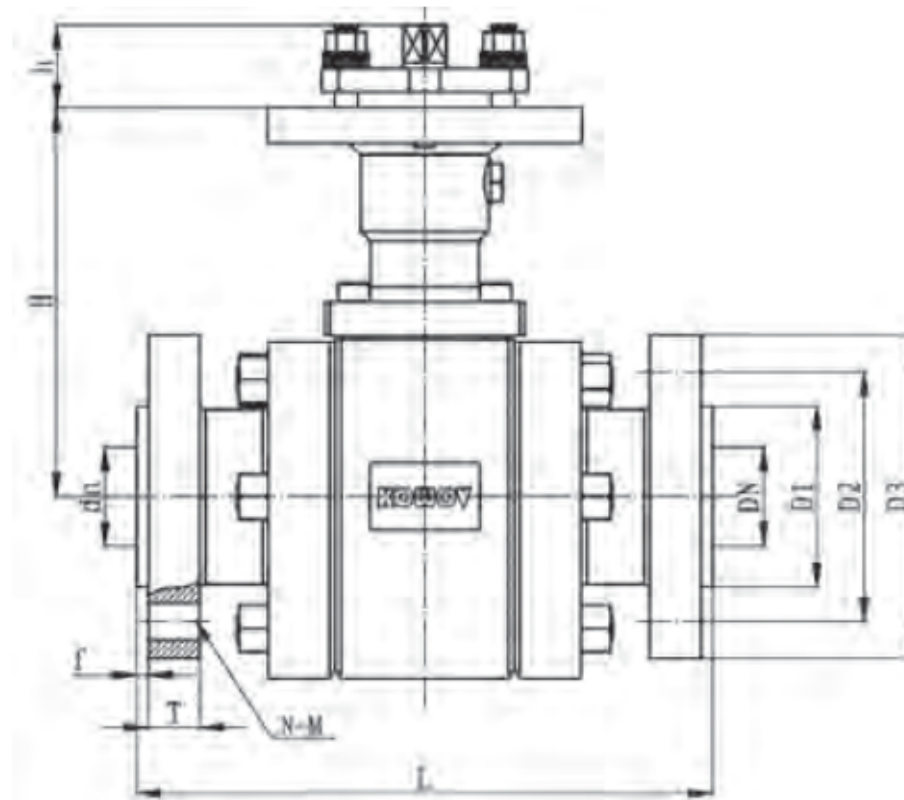

Dimensions in mm. Refer to the following tables for the model and pressure rating.

FCCV5 — FMU-110/600

DN (inch / mm) | Exterior size | DIN/HG PN100 and GB/HG/ASME/SH CLASS600 | Weight (kg)

inch	mm	dn	L	H	D1	D2	D3	N-M	T	f	D1	D2	D3	N-M	T	f	
1"	25	20	216	150	68	100	140	4-Φ19	22	2	50.8	88.9	125	4-Φ19	17.5	7	6.8
1 1/2"	32	25	229	170	78	110	155	4-Φ22	24	2	63.5	98.4	135	4-Φ22	20.7	7	13.0
1 1/2"	40	32	241	185	88	125	170	4-Φ22	26	2	73.0	114.3	155	4-Φ22	22.3	7	25.0
2"	50	40	292	200	102	145	195	4-Φ26	28	2	92.1	127.0	165	8-Φ19	25.4	7	38.0
2 1/2"	65	50	330	220	122	170	220	8-Φ26	32	2	104.8	149.2	190	8-Φ22	28.6	7	60.0
3"	80	65	356	270	138	180	230	8-Φ26	34	2	127.0	168.3	210	8-Φ22	31.8	7	90.0
4"	100	80	432	305	162	210	265	8-Φ30	38	2	157.2	215.9	275	8-Φ26	38.1	7	125.0
5"	125	100	508	350	188	250	315	8-Φ33	38	2	185.7	266.7	330	8-Φ30	44.5	7	140.0
6"	150	125	559	350	218	290	355	12-Φ33	42	2	215.9	292.1	355	12-Φ30	47.7	7	180.0
8"	200	150	660	350	285	360	430	12-Φ36	50	2	269.9	349.2	420	12-Φ33	55.6	7	230.0

Dimensions: ANSI B16.10, ANSI B16.5, HG20615 and HG20592