


Outline dimensions

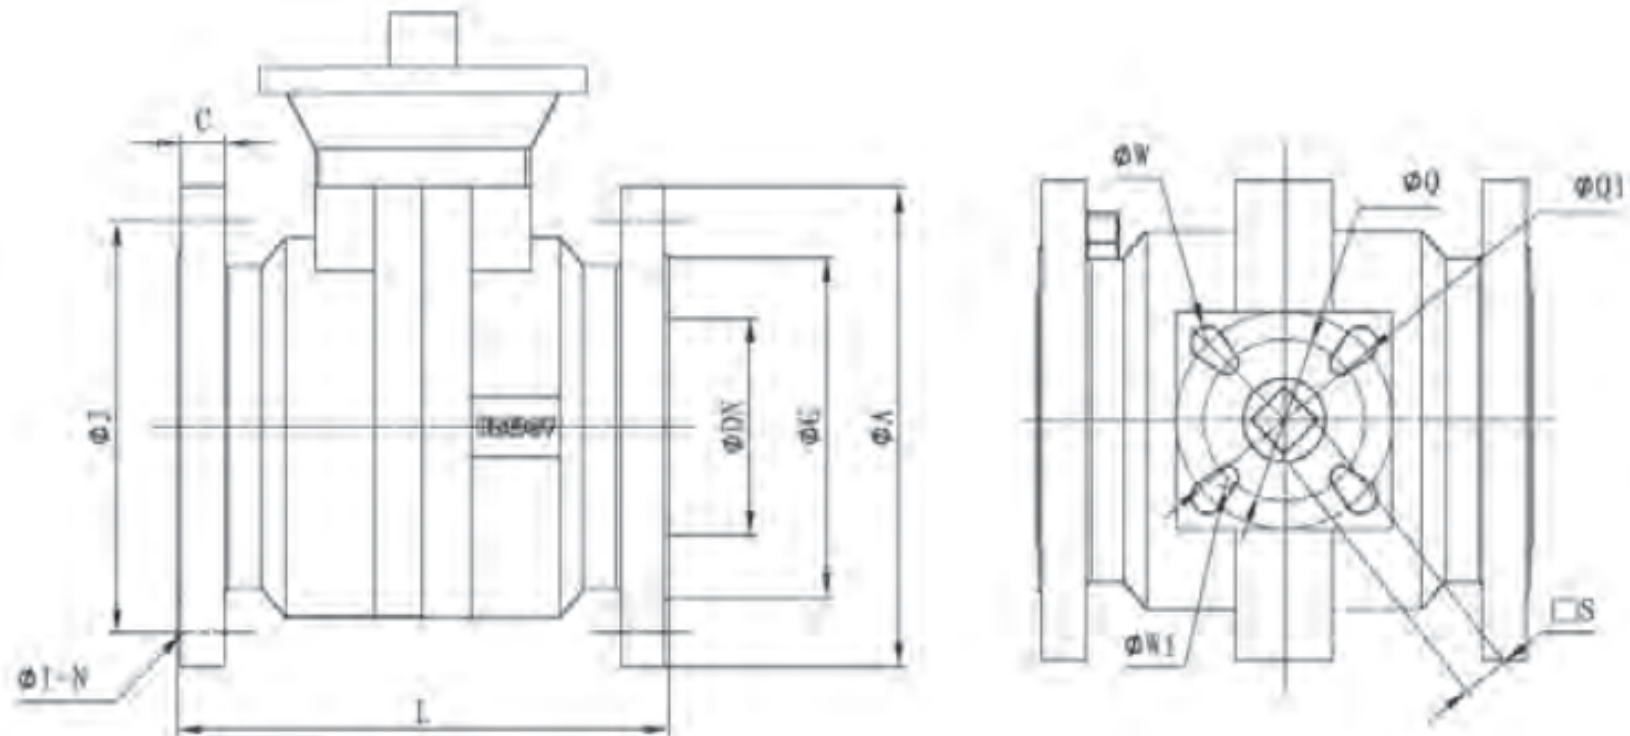

Dimensions in mm. Refer to the following tables for the model and pressure rating.

FCCV3 — FMU-16/25

DN (inch / mm) | Exterior size | GB/HG PN16 and GB/HG PN25 | Weight (kg)

inch	mm	L	Q	Q1	W	W1	S	A	J	C	I-N	A	J	C	I-N
1/2"	15	130		/	M6	/	11	95	65	16	4-Φ14	95	65	16	4-Φ14
3/4"	20	130		/	M6	/	11	105	75	18	4-Φ14	105	75	18	4-Φ14
1"	25	140		/	M8	/	14	115	85	18	4-Φ14	115	85	18	4-Φ14
1 1/2"	40	165		/	M8	/	17	150	110	18	4-Φ18	150	110	18	4-Φ18
2"	50	203		/	M8	/	17	165	125	18	4-Φ18	165	125	20	4-Φ18
2 1/2"	65	222	102	/	M10	/	22	185	145	18	4/8-Φ18	185	145	22	8-Φ18
3"	80	241	102	/	M10	/	22	200	160	20	8-Φ18	200	160	24	8-Φ18
4"	100	305	125	102	M12	M10	27	220	180	20	8-Φ18	235	190	24	8-Φ23
5"	125	356	140	125	M16	M12	27	250	210	22	8-Φ18	270	220	26	8-Φ25
6"	150	394	165	140	M20	M16	36	285	240	22	8-Φ22	300	250	28	12-Φ25
8"	200	457	165	140	M20	M16	36	340	295	24	12-Φ22	360	310	30	12-Φ25

FCCV3 — FMU-150

DN (inch / mm) | Exterior size | CLASS150 | Weight (kg)

inch	mm	L	Q	Q1	W	W1	S	A	J	C	I-N
1/2"	15	108	50	/	M6	/	11	95	60.5	14	4-Φ16
3/4"	20	117	50	/	M6	/	11	105	70.0	15	4-Φ16
1"	25	127	70	/	M8	/	14	110	79.5	17	4-Φ16
1 1/2"	40	165	70	/	M8	/	17	125	98.5	18	4-Φ16
2"	50	178	70	/	M8	/	17	150	121.0	18	4-Φ19
2 1/2"	65	190	102	/	M10	/	22	180	140.0	18	4-Φ19
3"	80	203	102	/	M10	/	22	190	152.5	20	4-Φ19
4"	100	229	125	102	M12	M10	27	230	190.5	20	8-Φ19
5"	125	356	140	125	M16	M12	27	255	216.0	22	8-Φ22
6"	150	394	165	140	M20	M16	36	280	241.5	22	8-Φ22
8"	200	457	165	140	M20	M16	36	345	298.5	24	8-Φ22